


DECUFFER HORIZONTAL FOLDER DHF-41

The DHF-41 automatically decuffs, folds and tucks the bag into the crate by horizontal folding.

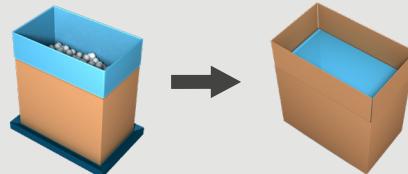

GENTLE
TUCK-IN &
EASY OPENING

Securely folded bags

- **Gently tucks** the bag around the product
- Stays **perfectly closed** in the coldstore

Refoldable bag

- **Perfect for export**
- **Easy open**: no knife needed



Watch our videos
at pattyn.com

TECHNICAL SPECIFICATIONS

Perfectly controlled bag folding and tucking

- Unique two-in-one stretcher function
- Servo-driven stretchers for gentle tucking

High speed

- Up to 12 crates per minute

Hygienic balcony design, easy to clean

- Cleaning mode: to facilitate an improved cleaning accessibility.

Equipped with:

- 15" HMI for easy operation
- Remote access point (one per line)
- Vacuum bag decuffing



Vacuum bag decuffing



The bag is tightly folded horizontally

CONTAINER SPECIFICATIONS (For other dimensions, please contact Pattyn)


Type	Crates / Trays	
Range (L x W x D) mm	Min. 400 L x 300 W // 200 D Max. 600 L x 400 W // 500 D	
	Outside dimensions	
FILM SPECIFICATIONS		
Type	PE (LDPE, HDPE)	
Thickness	As from 10 µm	
	 $S = X + 2Y$ $X = L + 15$ $Y = (W + 25) / 2$ $S = \max 1080 \text{ mm}$ $L + W + 40 \leq S \leq L + W + 90$ $140 \leq Q \leq 180 \text{ mm}$	
OUTPUT AND CONSUMPTION		
Output	Up to 12 c/min	
Installed power	12 kW	
Voltage	3 x 400 V + N + E / 50 Hz	
Air supply	6 bar / 1/2" min	
Air consumption	20 NI / cycle	
Weight	1000 kg	



Gentle and secure bag tucking



15 " HMI

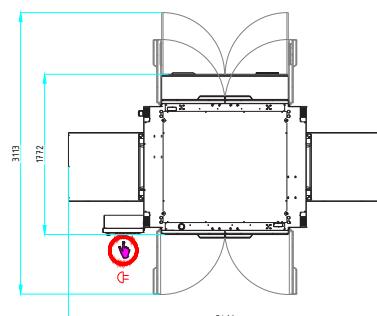

Machine height 2730 mm

Pattyn Belgium nv
Industriepark 'Blauwe Toren'
Hoge Hul 2, 8000 Brugge - Belgium

T +32 (0) 50 450 480
info@pattyn.com
www.pattyn.com

pattyn.com

The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customised executions please contact Pattyn. DHF-41 2024 - V01

PATTYN®

Turnkey solutions for industrial packaging.