


BAG DECUFFER CLOSER DF-21-XL FOLDER DS-21-XL SEALER

The DF/DS-21-XL automatically decuffs, regussets and folds/heat seals the bag. Both bag closers handle all kinds of pallet containers (pallet boxes, octabins, wooden crates, wire mesh, etc,...).

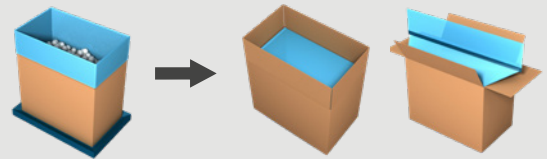

**AUTOMATIC &
PERFECT BAG
FOLDING OR
SEALING**

Protect your product

- The DF-21- XL guarantees a **perfect bag overlap folding** to avoid contact between the product and the carton.
- The DS-21-XL heat seals the bag. Tamper evident.

No box too big to handle

- **Automatic bag folding or sealing** to eliminate non ergonomic manual handling.
- Up to 90 c / hour.



Watch our videos
at pattyn.com

TECHNICAL SPECIFICATIONS

Perfectly controlled decuffing

- Each decuffer is equipped with a vacuum suction cup with mechanical clamping device and integrated bag detection.
- Specially developed integrated bag detection system.

Controlled bag overlap folding

- Regussetting and bi-directional folding ensures perfect bag closing and eliminates contact between product and carton.

Controlled bag sealing

- The bag is regusseted before sealing.
- Impulse heat sealing from both sides.

Standard equipped with

- 15" colour touch panel for easy operation.
- remote access point (one per line).



Regussetting before sealing




Bag overlap folding




Bag sealing



Combined bag closer with case closing module (optional)

CONTAINER SPECIFICATIONS (For other dimensions, please contact Pattyn)	
Type	Pallet containers (pallet boxes, octabins, wooden crates, wire mesh cages,...)
Range (L x W // D) inches	Min. 31 1/2" (L) x 19 1/2" (W) // 25 1/2" (D) Max. 55" (L) x 51" (W) // 59" (D)
	Outside dimensions
FILM SPECIFICATIONS	
Type	Tubular film with gussets (side folds)
Thickness	Min. 2 mils
OUTPUT AND CONSUMPTION	
Output	Up to 90 c / hour
Installed power	15 kW
Voltage	3 x 480V + E / 60Hz
Air supply	90 PSI, (1/2" min)
Air consumption	12 ft³/cycle
Weight	3420 lbs
OPTIONS (More options are available, please contact Pattyn)	
Press with vacuum technology with additional shaking device	
Additional product levelling device	
Case closing module with tape or hot melt or strapper	
Extendable machine frame for high containers up to 78 3/4"	
Flaps down modus	
Bag perforation module for easy bag opening	

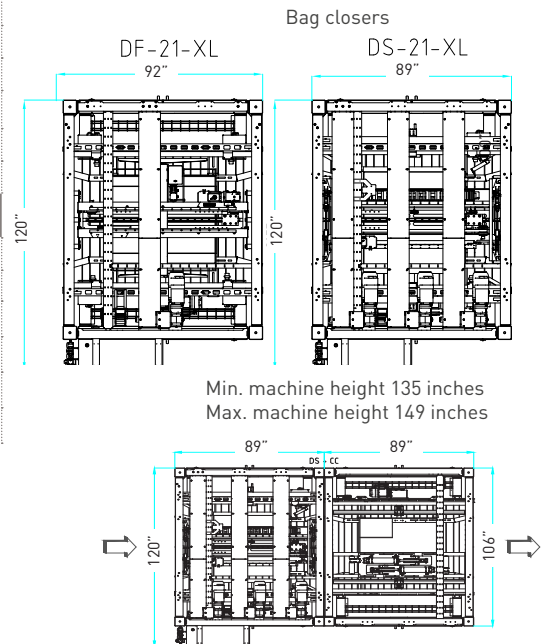

Pattyn North America Inc.
N56W24660 N. Corporate Circle
Sussex, WI 53089 - U.S.A.

Ph +1 262-966-0300
Fax +1 262-966-0312
SalesUsa@pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customized executions please contact Pattyn. DF-21-XL / DS-21-XL 2021 - V01



Turnkey solutions for industrial packaging.