


DECUFFER HORIZONTAL FOLDER DHF-41

The DHF-41 automatically decuffs, folds and tucks the bag into the crate by horizontal folding.

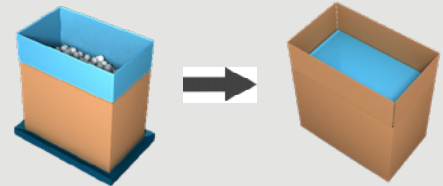

GENTLE
TUCK-IN
& EASY
OPENING

Securely folded bags

- **Gentle tucks** the bag around the product
- Stays **perfectly closed** in the coldstore

Refoldable bag

- **Perfect for export**
- **Easy open:** no knife needed



Watch our videos
at pattyn.com

TECHNICAL SPECIFICATIONS

Perfectly controlled bag folding and tucking

- Unique two-in-one stretcher function
- Servo-driven stretchers for gentle tucking

High speed

- Up to 12 crates per minute

Hygienic balcony

- Cleaning mode: to facilitate an improved cleaning accessibility.

Equipped with

- 15" HMI for easy operation.
- Remote access point (one per line)
- Vacuum bag decuffing



Vacuum bag decuffing




The bag is tightly folded horizontally



Gentle and secure bag tucking



15" HMI

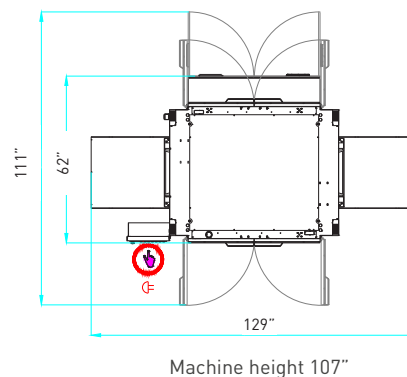

CONTAINER SPECIFICATIONS (For other dimensions, please contact Pattyn)	
Type	Crates/ Trays
Range (L x W x D) inches	Min. 15.8" (L) x 11.8" (W) x 7.9" (D) Max. 23.6" (L) x 15.8" (W) // 19.7" (D)
	Outside dimensions
FILM SPECIFICATIONS	
Type	PE (LDPE, HDPE)
Thickness	As from 0.3 mil
	$X = L + 5/8"$ $Y = (W + 1 3/4") / 2$ $5 1/2" \leq Q \leq 7"$
OUTPUT AND CONSUMPTION	
Output	Up to 12 c/min
Installed power	12 kW
Voltage	3 x 400V + E / 50 Hz
Air supply	87 PSI, (1/2" min)
Air consumption	0.7 ft ³ / cycle
Weight	2204 lbs

Pattyn North America Inc.
N56W24660 N. Corporate Circle
Sussex, WI 53089 - U.S.A

Ph +1 262-966-0300
Fax +1 262-966-0312
SalesUsa@pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customized executions please contact Pattyn. DHF-41 2025 - V01