


BAG DECUFFER SEALER HIGH END DS-31-HE

The DS-31-HE automatically decuffs, stretches and heat seals the bag. Designed to handle crates and for high cleanability and crate handling, the bag sealer meets the needs of the high demanding industries **with reduced energy consumption.**

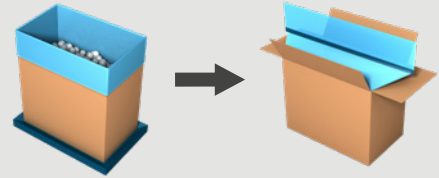

FOR HIGH
DEMANDING
APPLICATIONS

Protect your product

- **Shelf life extension** thanks to hermetic heat sealing, vacuum packing and gas flushing.
- **Two double sided impulse heat seals.**
- **High food safety:** minimal moving parts above the filled case.

Easy to use, easy to clean

- **Elimination of operator mistakes** thanks to the fully automatic format change.
- Random case height modus.
- **Tool-free changeover of vacuum probe** for cleaning.
- Special cleaning mode to **hose down conveyors.**



Watch our videos
at pattyn.com

TECHNICAL SPECIFICATIONS DS-31-HE

Vacuumize and gas flush installation

- Tool-free exchangeable vacuum probe to:
 - Excess air removal
 - Vacuumize until a set under pressure is reached
 - Vacuumize and gas flush for shelf life extension

A perfect hermetic seal

- Full and optimised decuffing with vacuum decuffer
- Integrated bag detection with servo motor driven stretcher plates.
- Two double sided impulse heat seals with upper and lower clamping device to keep film stress free during sealing.

Equipped with


- HMI colour touch panel: Intuitive 15" HMI for easy operation
- Multicolour warming light
- Remote Access Point



Vacuum decuffer hooks




Bag stretching with integrated decuffer control

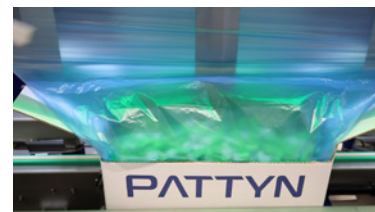

Vacuumizing & gas flushing



Your product 100% protected

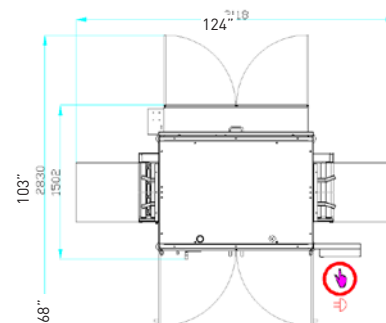

Machine height 103 inches

CONTAINER SPECIFICATIONS (For other dimensions, please contact Pattyn)	
Type	Cases, boxes, trays, crates
Range [L x W x H // D] inches	Standard mono footprint (LxW) / variable heights
	Min. 11" (L) x 10" (W) x 7 1/2" (H)
	Max. 23 1/2" (L) x 15 3/4" (W) // 25 1/2" (D)
	Outside dimensions
If S > 35" or when running crates or trays: optional gusset sealing is necessary. (S = half of the circumference of the bag)	
FILM SPECIFICATIONS	
Type	PE based
Thickness	0.6 – 3 mil
	$X = L + 5/8"$
	$Y = (W + 1 1/4") / 2$
	$S = \max 35 1/2"$
	$L + W + 1 1/2" \leq S \leq L + W + 3 1/2"$
	$6" \leq Q \leq 7"$
OUTPUT AND CONSUMPTION	
Output without vacuum and gas flush installation	Up to 10 c/min Up to 8 c/min for SL
Installed power	11 kW
Voltage	3 x 480V + E / 60 Hz
Air supply	90 PSI, (1" min)
Air consumption	1.9 ft ³ / cycle
Weight	2755 lbs
OPTIONS (More options are available, please contact Pattyn)	
Vacuum installation	Vacuum & gas flush installation
Multi-footprint with variable case heights	
Hose down execution	
Gusset sealing for crates and trays or when S > 35"	
Perforation module for perforation below the seal for easy opening	

Pattyn North America Inc.
N56W24660 N. Corporate Circle
Sussex, WI 53089 - U.S.A.

Ph +1 262-966-0300
Fax +1 262-966-0312
SalesUsa@pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customized executions please contact Pattyn. DS-21-HE 2021 - V01